



(19) **United States**

(12) **Patent Application Publication**
Shreter et al.

(10) **Pub. No.: US 2013/0248500 A1**

(43) **Pub. Date: Sep. 26, 2013**

(54) **METHOD OF SEPARATING SURFACE LAYER OF SEMICONDUCTOR CRYSTAL USING A LASER BEAM PERPENDICULAR TO THE SEPARATING PLANE**

(52) **U.S. Cl.**
CPC **B23K 26/0063** (2013.01); **B23K 26/38** (2013.01)
USPC **219/121.67**; 219/121.73

(76) Inventors: **Yuri Georgievich Shreter**,
Saint-Petersburg (RU); **Yuri Toomasovich Rebane**, Saint-Petersburg (RU); **Aleksey Vladimirovich Mironov**, Saint-Petersburg (RU)

(57) **ABSTRACT**

This invention provides two variations of methods of separating a surface layer (307) of the semi-conductor crystal (101). In the first variation of the method, a focused laser beam (102) is directed onto the crystal (101) in such a way that focus is placed in the layer separation plane (304) perpendicular to the axis (103) of said beam (102), the laser beam (102) is moved with scanning the layer separation plane (304) with focus in the direction from the open side surface of the crystal (101) deep into the crystal with forming a continuous slit width of which is increased with every pass of the laser beam (102), the previous operation is performed up to separation of the surface layer (307). In the second variation of the method, pulse laser emission is generated; a focused laser beam is directed onto the crystal in such a way that focus is placed in the layer separation plane perpendicular the axis of said beam, a laser beam is moved in such a way that focus is moved in the layer separation plane with forming the non-overlapping local regions with a disturbed topology of the crystal structure and with reduced interatomic bonds, wherein said local regions is distributed over the whole said plane, an external action disturbing said reduced interatomic bonds is applied to the separable layer.

(21) Appl. No.: **13/990,359**

(22) PCT Filed: **Nov. 29, 2011**

(86) PCT No.: **PCT/RU2011/000943**


§ 371 (c)(1),
(2), (4) Date: **May 29, 2013**

(30) **Foreign Application Priority Data**

Nov. 29, 2010 (RU) 2010148544

Publication Classification

(51) **Int. Cl.**
B23K 26/00 (2006.01)
B23K 26/38 (2006.01)

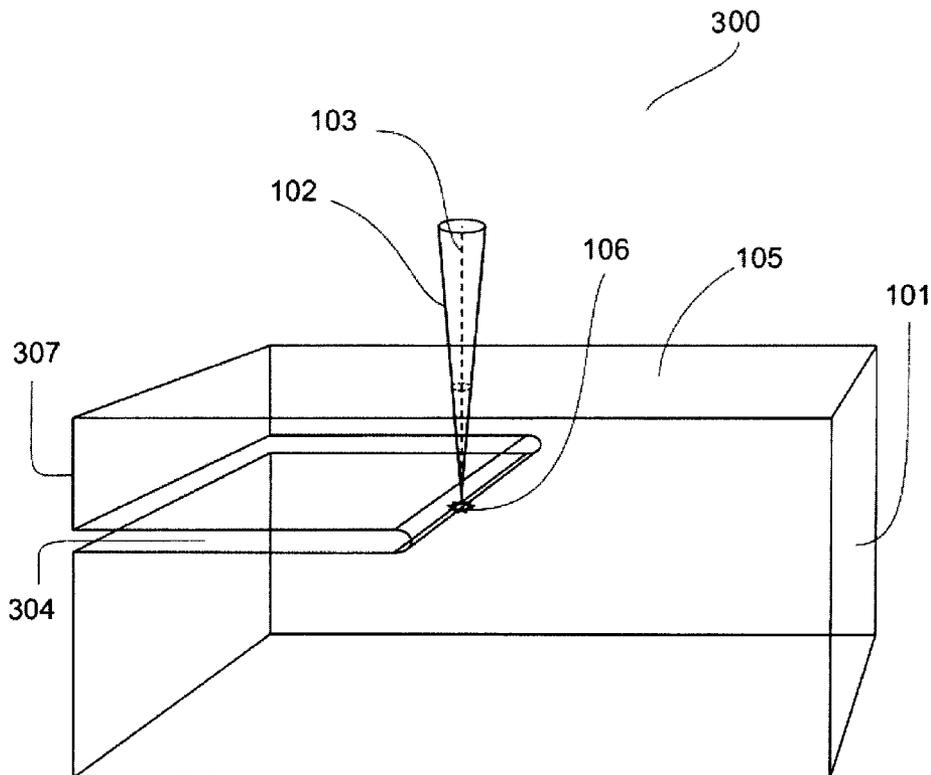

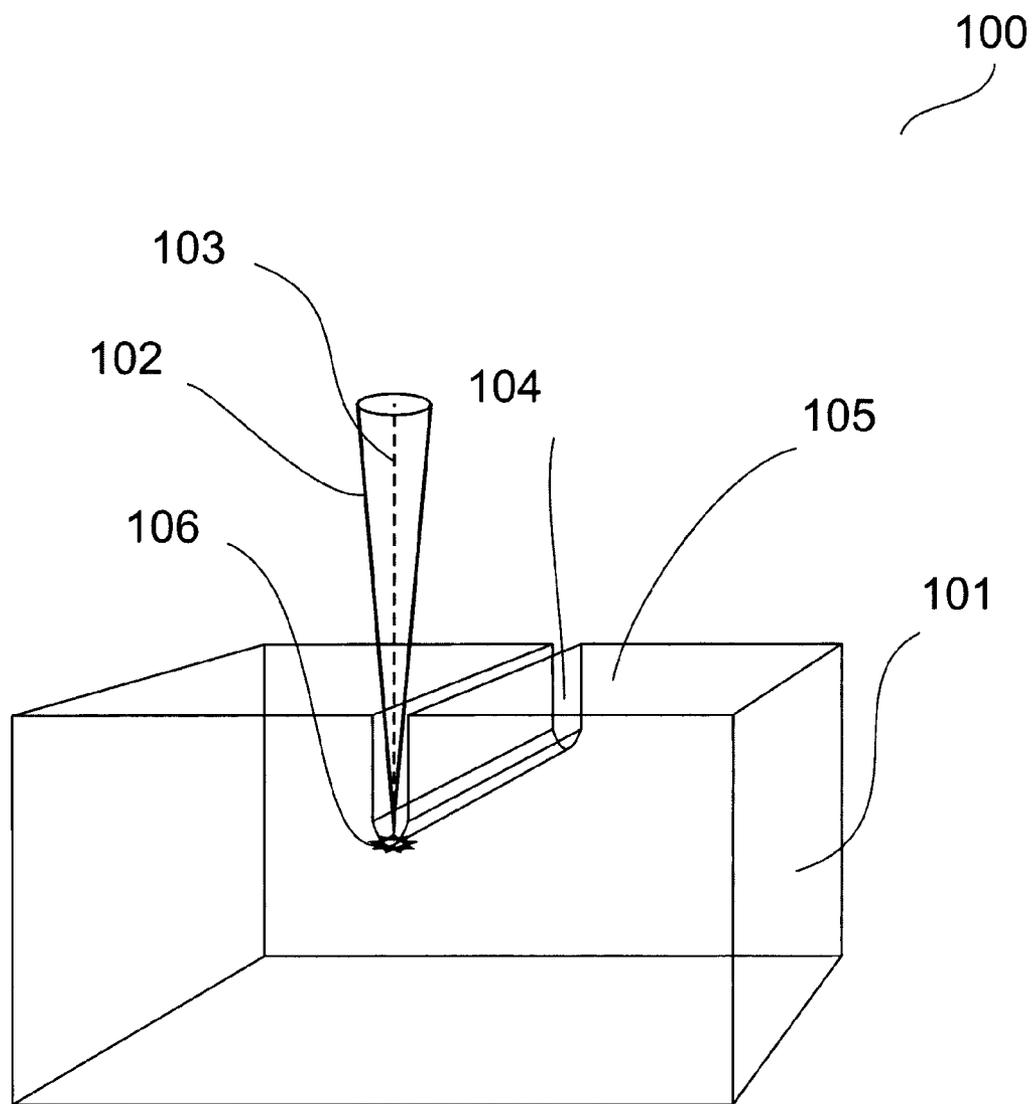


Fig. 1

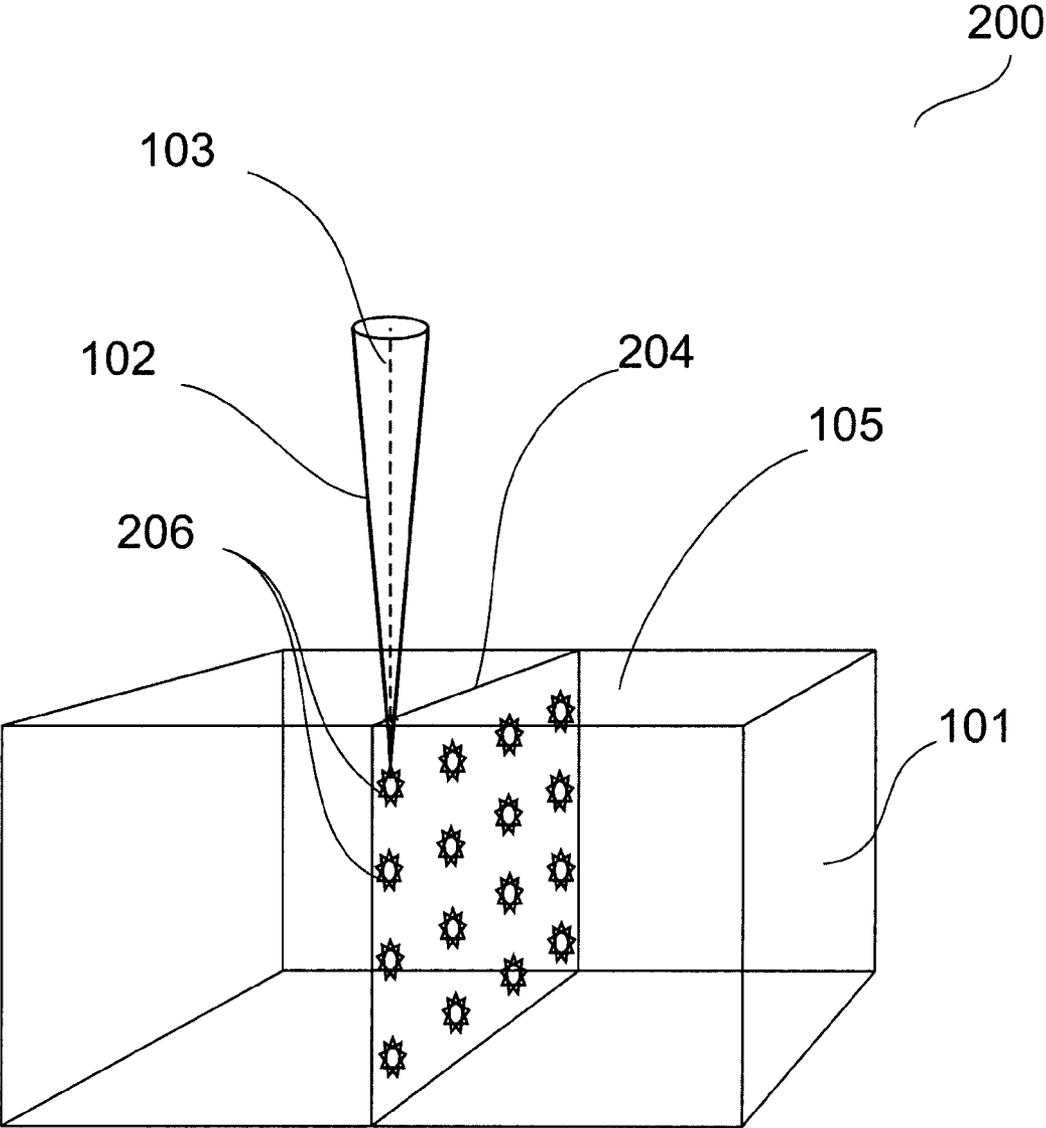


Fig. 2

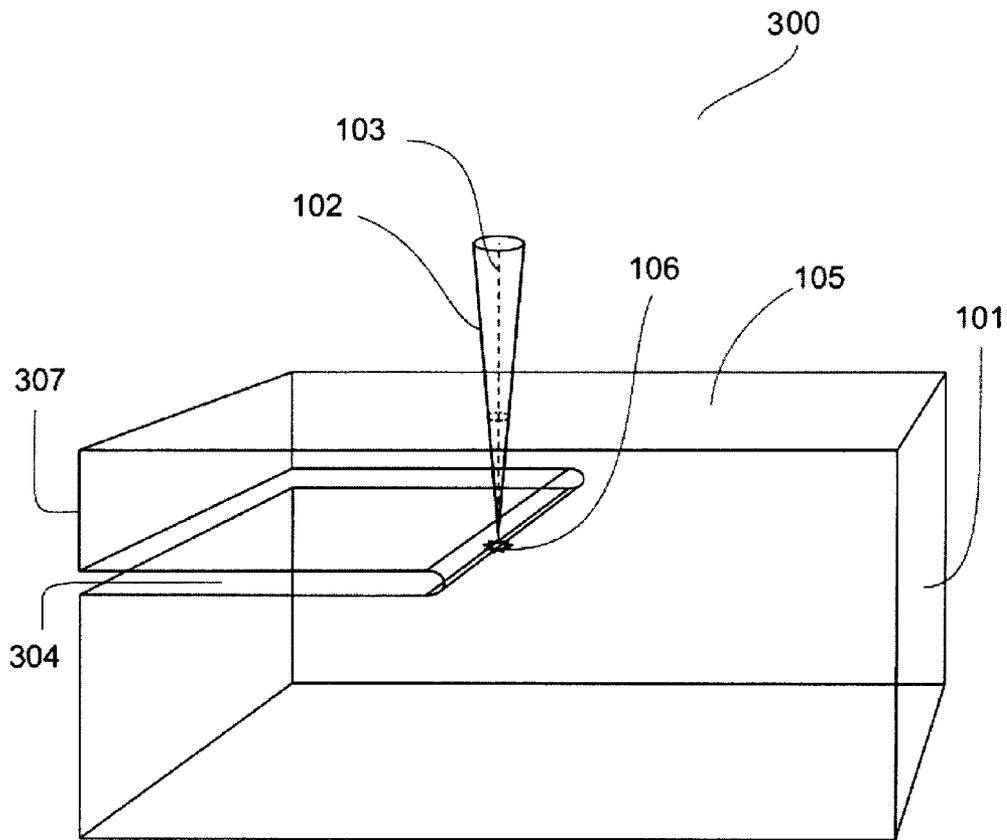


Fig. 3

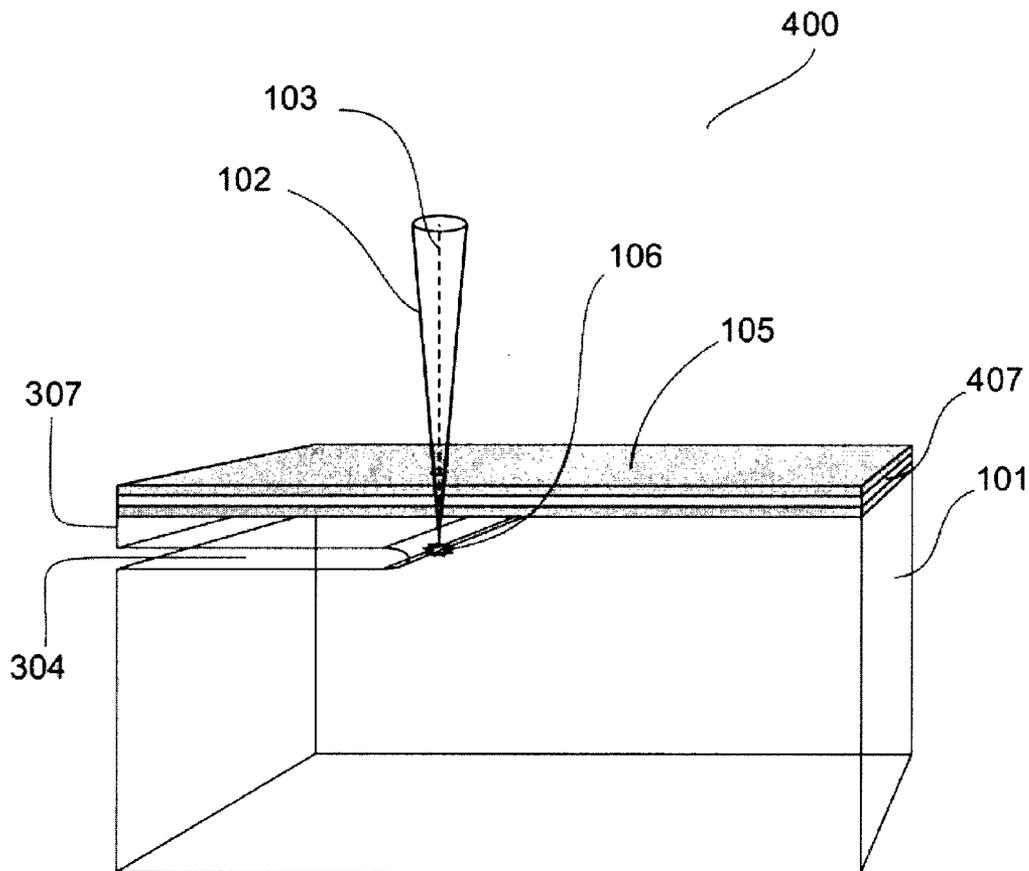


Fig. 4

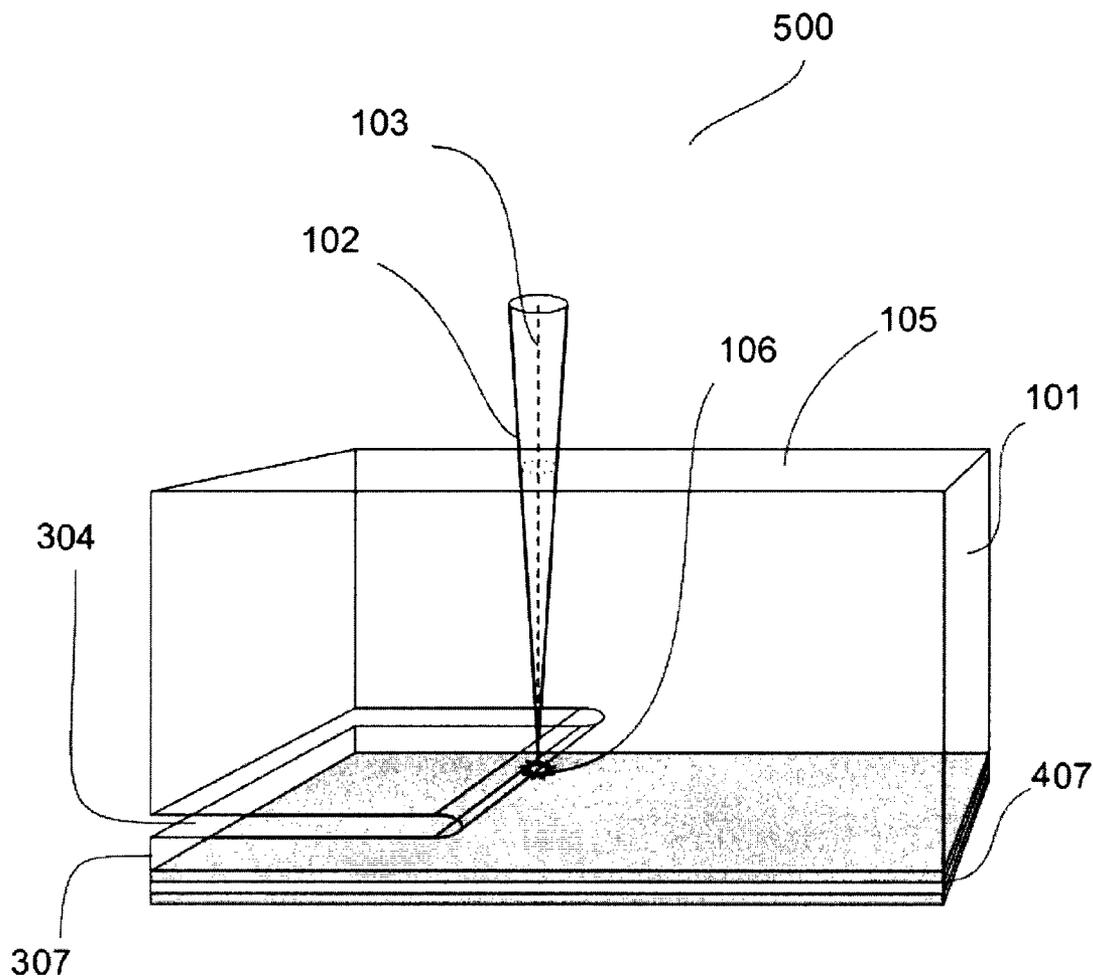


Fig. 5

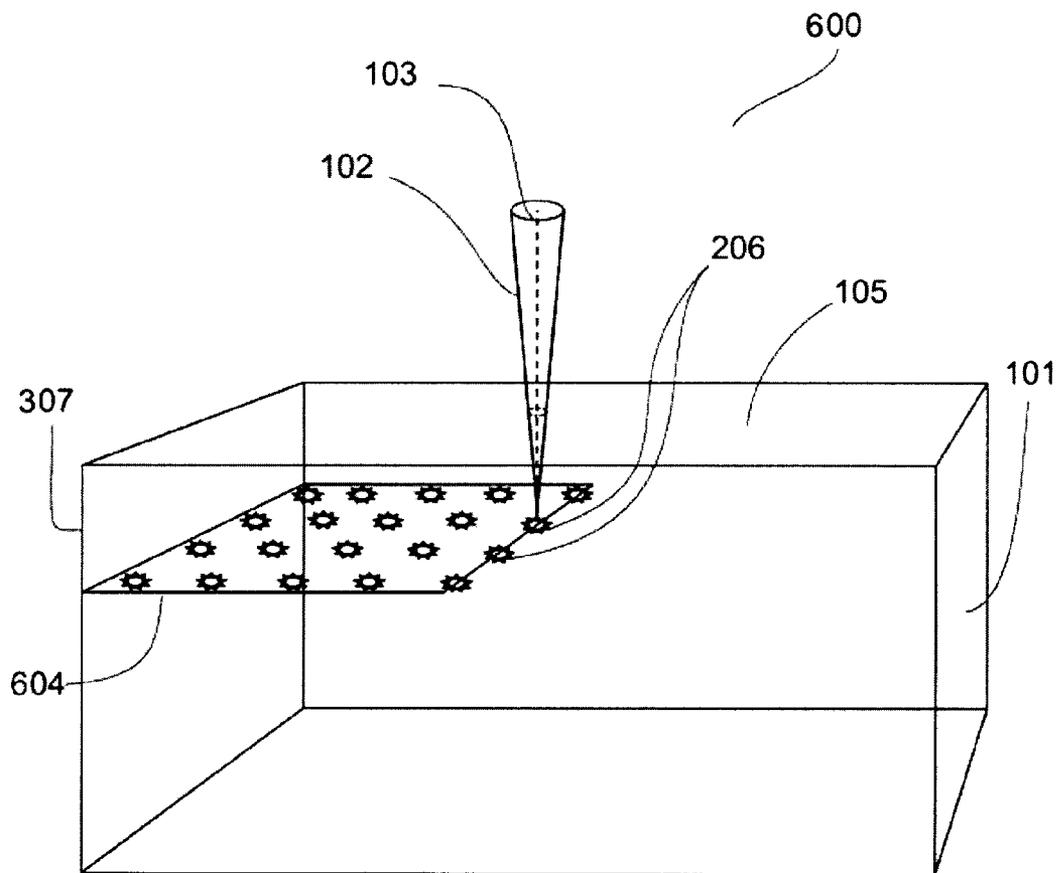


Fig. 6

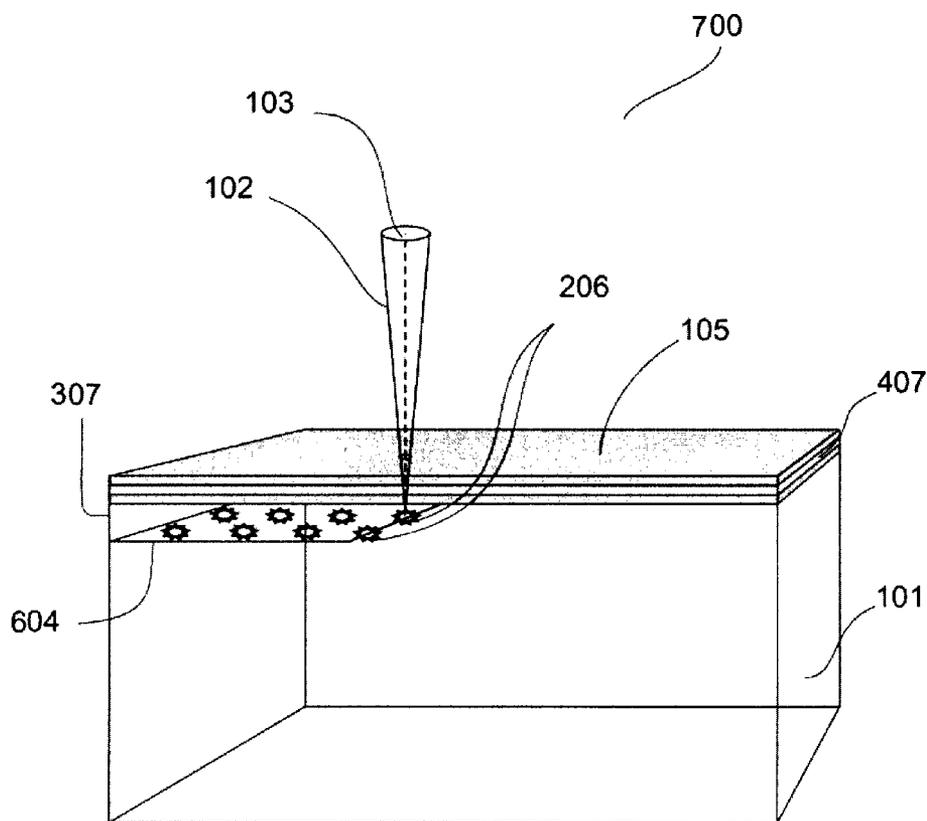


Fig. 7

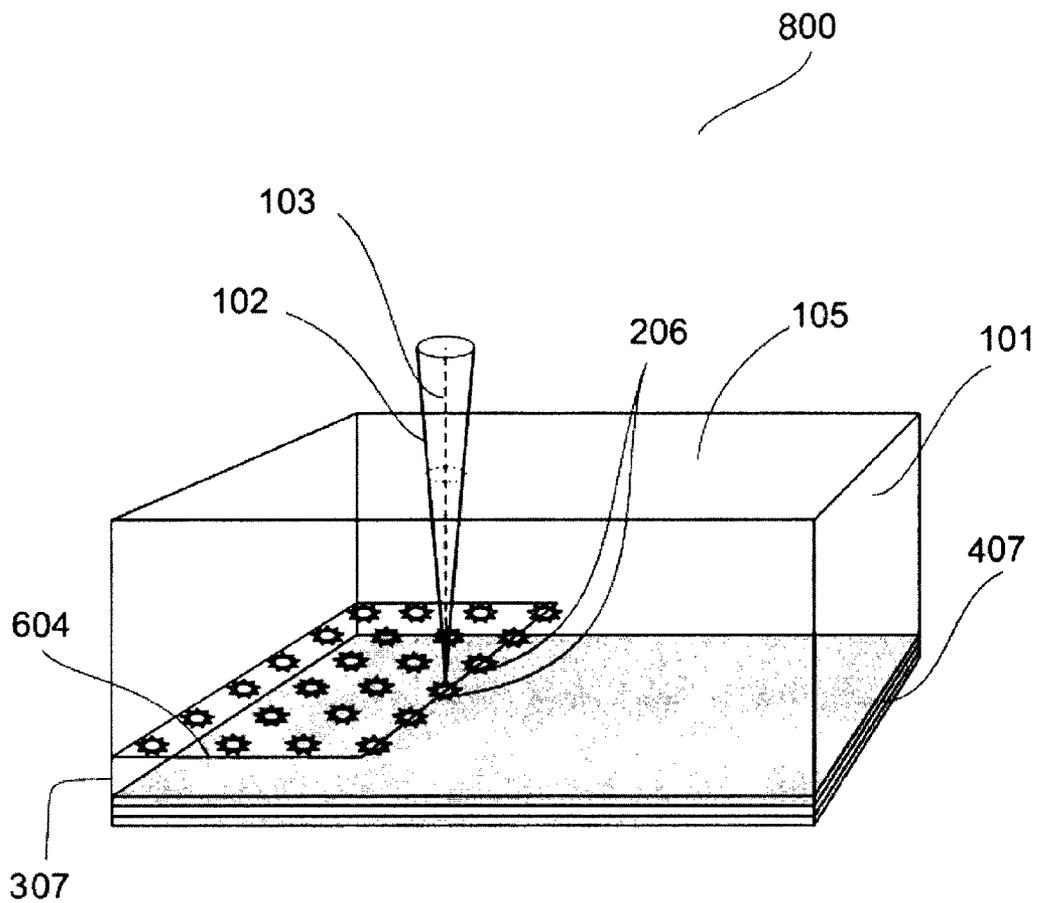


Fig. 8

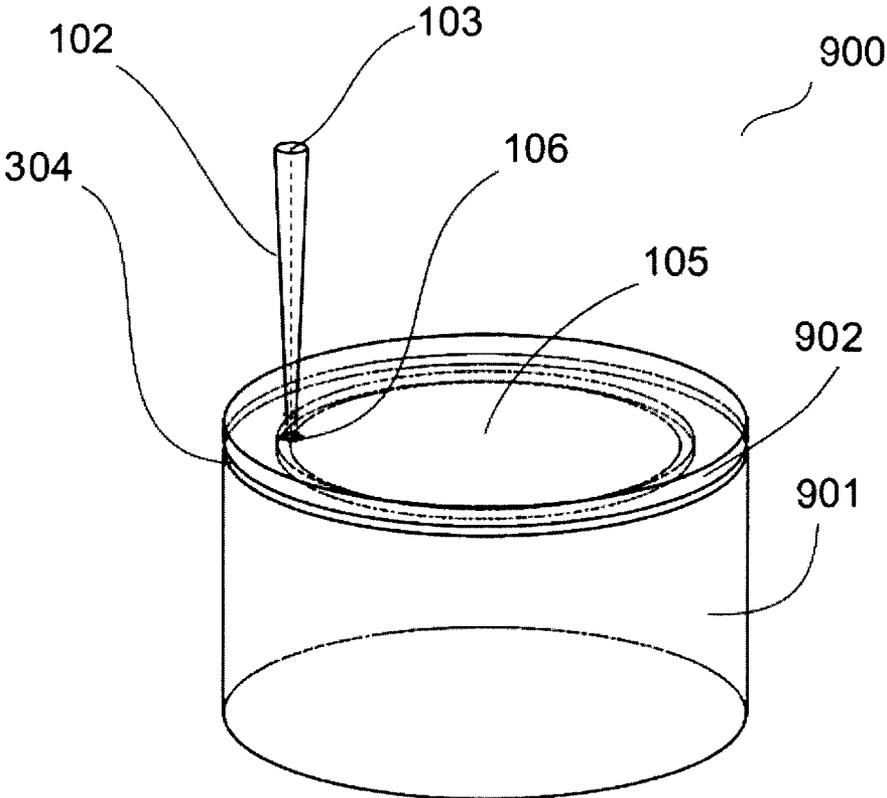


Fig. 9

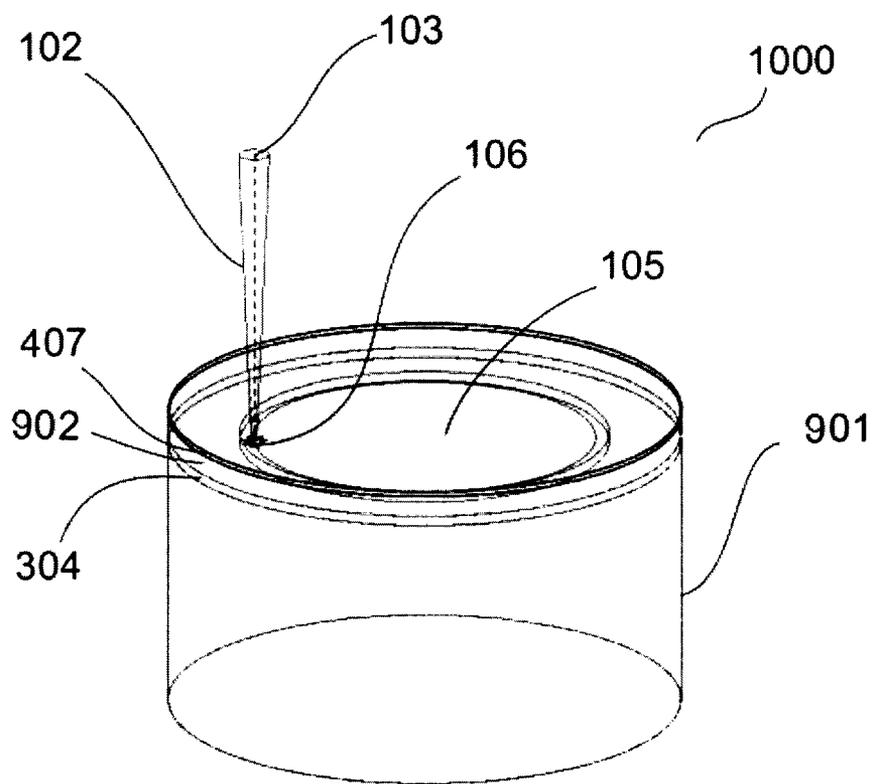


Fig. 10

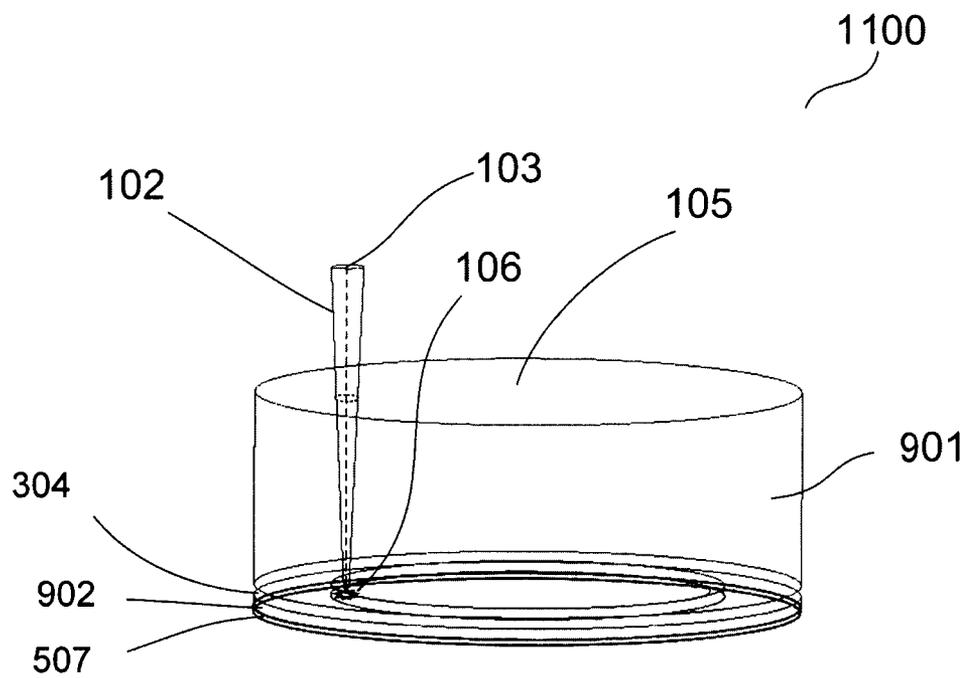


Fig. 11

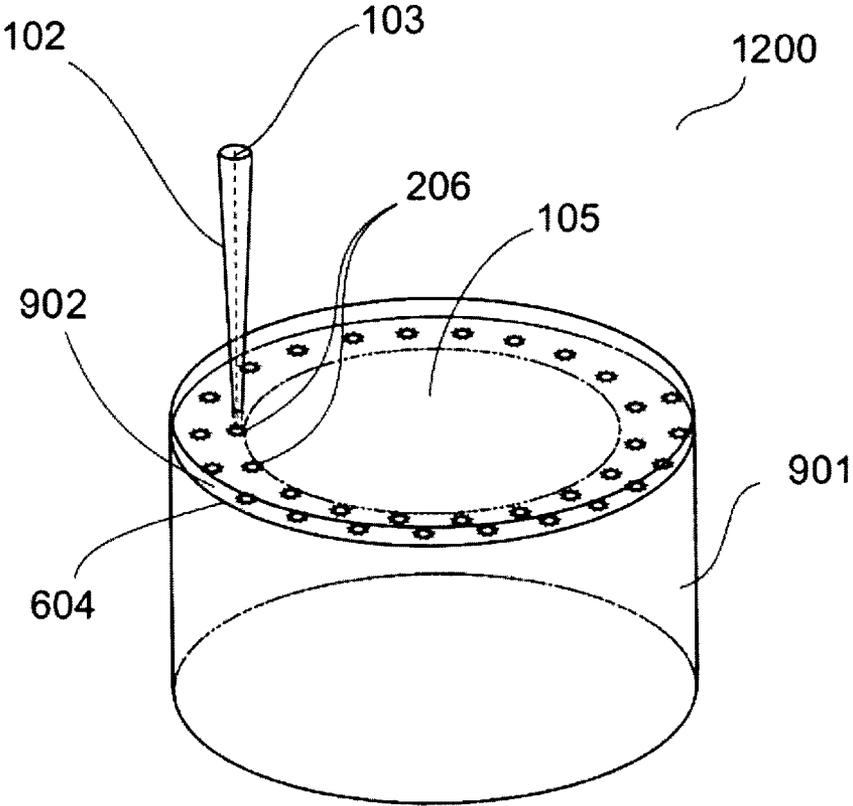


Fig. 12

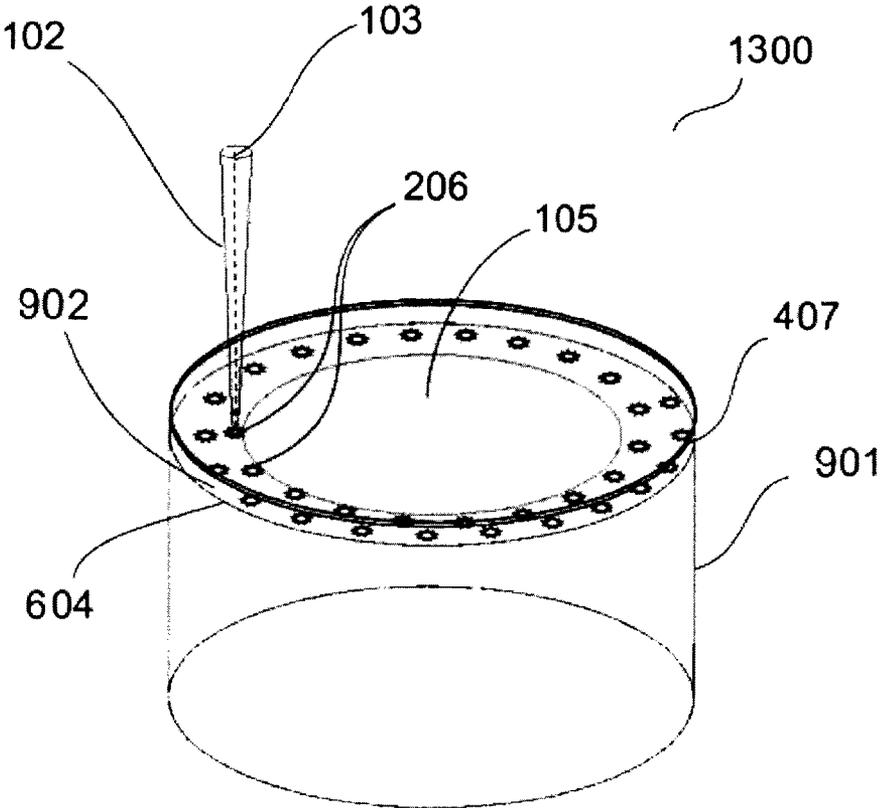


Fig. 13

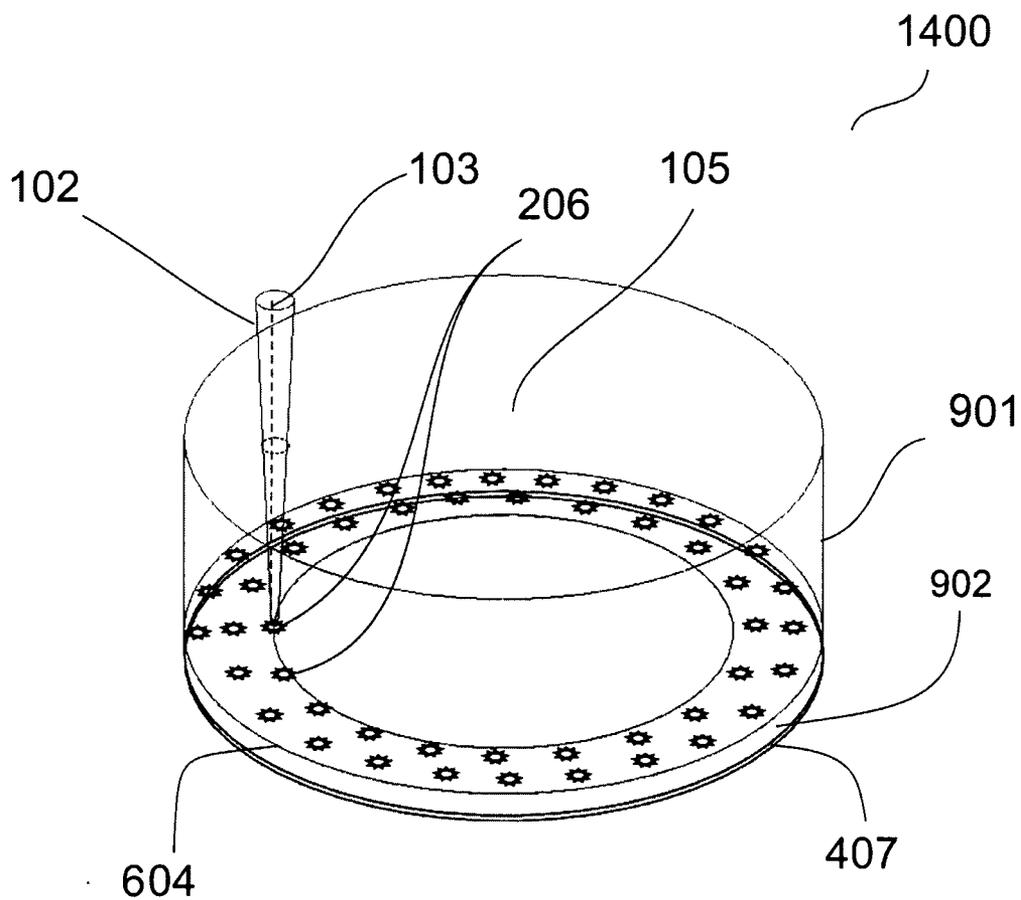


Fig. 14

**METHOD OF SEPARATING SURFACE LAYER
OF SEMICONDUCTOR CRYSTAL USING A
LASER BEAM PERPENDICULAR TO THE
SEPARATING PLANE**

TECHNICAL FIELD

[0001] Group of the inventions relates to laser treatment of hard materials, in particular, to the method of separating surface layer of semiconductor crystals by means of a laser including laser cutting.

BACKGROUND ART

[0002] Laser cutting of semiconductor crystals is widely used during the last ten years and is one of the main methods of separating semiconductor instrument structure into separate chips (U.S. Pat. No. 4,224,101, U.S. Pat. No. 5,922,224). This separation can be carried out by means of vertical laser cutting of the semiconductor crystal **101** piece into separate chips, scheme **100** of which is given in FIG. 1, or by means of vertical laser cutting of the semiconductor washer. With the method of vertical laser cutting, focused laser beam **102** is moved in the plane parallel to its axis **103** which leads to a vertical flat cut **104** parallel towards the axis of the focused laser beam **103** and perpendicular to the crystal **105** surface, through which laser emission enters the crystal. When focusing laser beam on the crystal surface, vertical flat cut **104** is formed at the expense of the thermal chemical decomposition or evaporation of the crystal in the vicinity **106** of the laser beam focus.

[0003] The drawback of the cutting method with the beam focusing onto the crystal surface is overdeposition of the part of the evaporated material on the cut edges, and microcracks on the cut edges, caused by thermal stresses (U.S. Pat. No. 7,682,937). This leads to an additional consumption of the expensive semiconductor material and in the necessity of removing the overdeposited material by means of chemical etching as described in patents U.S. Pat. No. 4,224,101, U.S. Pat. No. 7,682,937.

[0004] Provided in the USA patents U.S. Pat. No. 7,547,613, U.S. Pat. No. 7,626,137, method of vertical laser cutting with focusing of pulse laser emission under the upper surface of the transparent semiconductor crystal within the crystal allows avoiding overdeposition of evaporated material and additional consumption of the semiconductor material. Scheme of cutting with focusing of laser beam under the upper surface of the transparent semiconductor crystal **200** is given in FIG. 2. With this method of cutting, local regions **206** are formed in the cutting plane near the positions of the laser beam focus, within which the structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Movement of the laser beam in vertical plane **204** perpendicular to the surface of crystal **105** and parallel to the axis of the focused laser beam **103** allows creating the ordered set of the local regions **206** being in a single vertical plane **204**, FIG. 2. Since mechanical strength of the vertical plane **204** with a set of local regions **206** is significantly reduced, then in applying an external mechanical or thermomechanical stress, crystal splits along this vertical plane (see patents U.S. Pat. No. 7,547,613, U.S. Pat. No. 7,626,137).

[0005] The above methods of vertical laser cutting allow cutting the semiconductor crystals **101**, FIG. 1 and FIG. 2, and semiconductor washers into separate chips, but not able

to provide separation of the semiconductor instrument structures from the crystal substrates in horizontal plane or semiconductor washers from cylindrical semiconductor boules. This invention provides two variations of the method of separating surface layer of the semiconductor crystal which allow solving these problems.

DISCLOSURE OF INVENTION

[0006] This invention provides two variations of the method of separating surface layer of the semiconductor crystal. In one variation of the method, separation is carried out by means of laser cutting. For this, the focused laser beam is directed on the crystal in such a way, that focus is in the layer separation plane perpendicular to the axis of said beam, laser beam is moved with scanning the layer separation plane with focus in the direction from the open side crystal surface deep into forming a continuous slit width of which increases with every pass of the beam. The previous operation is performed up to separation of the surface layer.

[0007] To separate layer from the crystal in the form of cylindrical boule, scanning of the layer separation plane is carried out from the side cylindrical surface deep into on a spiral path.

[0008] To separate layer from the crystal in the form of parallelepiped, scanning of the layer separation plane is carried out by reciprocal movement of the beam with single step shift forming path of the focus movement in the form of meander.

[0009] In the preferred embodiment, a crystal or a crystal boule can be previously heated up to 100-1000° C. to avoid cracking of the crystal.

[0010] In another variation of the method of separating surface layer of the semiconductor crystal, provided in the scope of this invention, pulse laser emission is generated, focused laser beam is directed on the crystal in such a way, that focus is in the layer separation plane perpendicular towards the axis of said beam, laser beam is moved in such a way that focus is moved in layer separation plane forming non-overlapping local regions with disturbed topology of the crystal structure and with reduced interatomic bonds, wherein said local regions are distributed over the whole said plane. Then an external action is applied to the separable layer which destroys said reduced interatomic bonds.

[0011] An external action can be mechanical or thermomechanical.

[0012] Thermomechanical action can be provided with use of the metal plate attached to the external surface of the separable layer and by heating to 50-1000° C. Distance between the centers of said non-overlapping local regions can constitute 0.03-0.3 of the separable layer thickness.

[0013] This invention differs from the existing prototypes shown in FIG. 1 and FIG. 2 in that the laser beam is always focused under the crystal surface and its focus is moved in horizontal plane parallel to the crystal surface through which laser beam enters the crystal, and perpendicular to the focused laser beam (this plane is referred to hereinafter as lateral plane).

[0014] In the first variation of the method, in the layer separation plane thermal chemical decomposition or evaporation of the crystal in the vicinity of the laser beam focus occurs, wherein this plane is parallel to the separable surface of the crystal. Thus, the method provided allows cutting semiconductor crystals and boules, separating the surface layers from the semiconductor crystals, semiconductor washers

from cylindrical semiconductor boules. In application to semiconductor crystals and cylindrical semiconductor boules with grown surface instrument structures, the method provided allows separating thin semiconductor layers and thin semiconductor washers with grown instrument structures from semiconductor crystals and cylindrical semiconductor boules.

[0015] In the first variation of the method, when using short laser pulses of medium power, thermal chemical decomposition or evaporation of the crystal in the vicinity of the laser beam focus does not occur, laser beam generates local regions in which the structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical crystal strength is decreased.

[0016] In this case, movement of the laser beam focus in the horizontal plane parallel to the crystal surface through which laser beam enters the crystal, and perpendicular to the axis of the focused laser beam cone, leads to creation of a set of the non-overlapping local regions with disturbed structure of the chemical bonds in the layer separation plane which is placed under the separable surface of the crystal in the depth defined by the depth of laser beam focusing. Since mechanical strength of the crystal in the separation plane with the set of the local regions is significantly reduced, then in applying external mechanical or thermomechanical stress, crystal splits along this plane with separating the surface layer lying higher or lower the separation plane depending on the depth of the laser beam focusing.

[0017] Separation method according to the second variation allows cutting the semiconductor crystals and boules laterally separating the surface layers from the semiconductor crystals, semiconductor washers from cylindrical semiconductor boules without loss of semiconductor material. In application to semiconductor crystals and cylindrical semiconductor boules with grown surface instrument structures, the second variation of the method allows separating thin semiconductor layers and thin semiconductor washers with grown surface instrument structures from semiconductor crystals and cylindrical semiconductor boules respectively.

[0018] Provided variations of the inventive method of separating surface layer of semiconductor crystal (used hereinafter as "laser cutting") allows separating flat surface layers from semiconductor crystals, in particular, surface layers with semiconductor instrument structures from semiconductor crystals. Besides, the provided methods allow separating semiconductor washers from cylindrical semiconductor boules including thin semiconductor washers with instrument structures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] This invention is illustrated by the drawings, FIG. 1 and FIG. 2 show prior art and FIGS. 3-14 show various embodiments of this invention.

[0020] FIG. 1 is a scheme illustrating the known prior art method of vertical laser cutting of semiconductor crystal using a high focused laser emission leading to a thermal chemical decomposition or evaporation of the crystal in the vicinity of the laser beam focus.

[0021] FIG. 2 is a scheme illustrating the known prior art method of vertical laser cutting of semiconductor crystal using a focused pulse laser emission creating the local regions in the vertical plane.

[0022] FIG. 3 is a scheme illustrating the first variation of the method of separating a surface layer of the semiconductor crystal.

[0023] FIG. 4 is a scheme illustrating the first variation of the method of separating a thin semiconductor layer comprising a grown instrument structure under its upper surface, from the semiconductor crystal.

[0024] FIG. 5 is a scheme illustrating the first variation of the method of separating a thin semiconductor layer comprising a grown instrument structure in its base, from the semiconductor crystal.

[0025] FIG. 6 is a scheme illustrating the second variation of the method of separating a surface layer of the semiconductor crystal.

[0026] FIG. 7 is a scheme illustrating the second variation of the method of separating a thin semiconductor layer comprising a grown instrument structure under its upper surface, from the semiconductor crystal.

[0027] FIG. 8 is a scheme illustrating the second variation of the method of separating a thin semiconductor layer comprising a grown instrument structure in the base, from the semiconductor crystal.

[0028] FIG. 9 is a scheme illustrating the first variation of the method of separating a surface layer of the semiconductor boule into semiconductor washers.

[0029] FIG. 10 is a scheme illustrating the first variation of the method of separating a thin semiconductor washer comprising a grown instrument structure under its upper surface, from the semiconductor boules.

[0030] FIG. 11 is a scheme illustrating the first variation of the method of separating a thin semiconductor washer comprising a grown instrument structure in the base, from the semiconductor boules.

[0031] FIG. 12 is a scheme illustrating the second variation of the method of separating a surface layer of the semiconductor boules into semiconductor washers.

[0032] FIG. 13 is a scheme illustrating the second variation of the method of separating a thin semiconductor washer comprising a grown instrument structure under its upper surface, from the semiconductor boules.

[0033] FIG. 14 is a scheme illustrating the second variation of the method of separating a thin semiconductor washer, comprising a grown instrument structure in its base, from the semiconductor boules.

BEST MODE FOR CARRYING OUT THE INVENTION

[0034] The present invention will become readily apparent from the following detailed description of exemplary embodiments. It should be noted that the consequent description of these embodiments is only illustrative, but not exhaustive.

[0035] For realizing the method, this invention uses laser emission of λ wavelength within the region of relative semiconductor transparency, namely between the edge of the main absorption and the region of the residual beams.

[0036] Preferably, wavelength λ of the laser beam is in the range of $2\pi\hbar/E_g \leq \lambda \leq c/v_0$, where E_g is a width of the forbidden gap for cutable semiconductor, v_0 is a frequency of the optical phonon for cutable semiconductor, c is a velocity of light, \hbar is Plank constant.

[0037] As follows from the above inequality, the preferred laser wavelength for lateral cutting of the silicon, germanium and gallium arsenide semiconductor is in the range of 0.8

$\mu\text{m} \leq \lambda \leq 20 \mu\text{m}$, for gallium nitride it is in the range of $0.35 \mu\text{m} \leq \lambda \leq 10 \mu\text{m}$, and for aluminum nitride it is in the range of $0.2 \mu\text{m} \leq \lambda \leq 8 \mu\text{m}$.

Example 1

[0038] FIG. 3 shows the scheme 300 illustrating the first variation of the method by the example of separating the surface layer of the gallium nitride semiconductor crystal. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor, with frequency doubling and generates light pulses with $\lambda=532 \text{ nm}$, energy of $5 \mu\text{J}$, duration of 5 ns and repetition rate of 1000 Hz . Laser beam is focused to the spot of $16 \mu\text{m}$ in diameter which provides energy density of 2 J/cm^2 .

[0039] Under action of the Nd:YAG laser beam 102 with wavelength $\lambda=532 \text{ nm}$ weakly absorbed in the gallium nitride crystal 101, focused under the upper crystal surface 105 at the depth of $100 \mu\text{m}$, the crystal is locally heated up to temperature higher than 900°C . leading to chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity 106 of the laser beam focus. Movement of the laser beam 102 focus at velocity of 1.5 cm/s in the horizontal (lateral) plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular towards the axis 103 of the focused laser beam, lead to consequent decomposition of gallium nitride and to increase of width of the lateral cut 304 from left to right deep into the crystal. On achieving by the lateral cut 304 the right bound of the crystal in FIG. 3, continuity of the crystal 101 is disturbed and the upper layer 307 being higher the cut 304 is separated from the main crystal. To avoid cracking of the gallium nitride crystal caused by thermal stresses laser cutting is performed at temperature $T_p=600^\circ \text{C}$.

Example 2

[0040] FIG. 4 shows the scheme 400 illustrating the first variation of the method by the example of separating a thin semiconductor layer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn under the upper surface, from semiconductor crystal. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor, and generates light pulses with $\lambda=532 \text{ nm}$, energy of $5 \mu\text{J}$, duration of 5 ns and repetition rate of 1000 Hz . Laser beam is focused to the spot of $16 \mu\text{m}$ in diameter which provides energy density of 2 J/cm^2 .

[0041] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532 \text{ nm}$ weakly absorbed in the gallium nitride crystal 101 and in the light diode structure 407 AlGaIn/InGaIn/AlGaIn, focused under the surface 105 at the depth of $50 \mu\text{m}$, the crystal is locally heated up to temperature higher than 900°C . leading to chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity 106 of the laser beam focus. Movement of the laser beam 102 focus at velocity of 1.5 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular towards the axis 103 of the focused laser beam, leads to consequent decomposition of gallium nitride and to increase of width of the cut 304 in the horizontal plane from left to right deep into the crystal. On achieving by the lateral cut 304 the right bound of the crystal in FIG. 4, continuity of the crystal 101 is disturbed and the upper layer 307 with grown light diode structure 407 AlGaIn/InGaIn/AlGaIn lying lower the cut 304 is separated from the

main crystal. To avoid cracking of the gallium nitride crystal caused by thermal stresses laser cutting is performed at temperature $T_p=600^\circ \text{C}$.

Example 3

[0042] FIG. 5 is a scheme 500 illustrating the first variation of the method by the example of separating a thin semiconductor layer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn in the base, from semiconductor crystal.

[0043] For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532 \text{ nm}$, and generates pulses with energy of $5 \mu\text{J}$, duration of 5 ns and repetition rate of 1000 Hz . Laser beam is focused to the spot of $16 \mu\text{m}$ in diameter which provides energy density of 2 J/cm^2 . Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532 \text{ nm}$ weakly absorbed in the gallium nitride crystal 101, but absorbed in the light diode structure AlGaIn/InGaIn/AlGaIn, focused deeply under the upper crystal surface 105, the crystal is locally heated up to temperature higher than 900°C . leading to the chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity 106 of the laser beam focus. Movement of the laser beam 102 focus at velocity of 1.5 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular towards the axis 103 of the focused laser beam, leads to consequent decomposition of gallium nitride and to increase of width of the cut 304 in the horizontal plane from left to right deep into the crystal. On achieving by the lateral cut 304 the right bound of the crystal in FIG. 5, continuity of the crystal 101 is disturbed and the lower layer 307 with grown light diode structure 407 AlGaIn/InGaIn/AlGaIn lying higher the cut 304 is separated from the main crystal.

Example 4

[0044] FIG. 6 is a scheme 600 illustrating the second variation of the method by the example of separating the surface layer of the gallium arsenide semiconductor crystal. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=1064 \text{ nm}$, and generates pulses with energy of $5 \mu\text{J}$, duration of 5 ns and repetition rate of 1000 Hz . Laser beam is focused to the spot of $2 \mu\text{m}$ in diameter which provides energy density of 2.5 J/cm^2 .

[0045] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=1064 \text{ nm}$ weakly absorbed in the gallium arsenide crystal 101, focused under the upper crystal surface 105 at the depth of $100 \mu\text{m}$, non-overlapping local regions 206 are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Movement of the laser beam 102 focus at velocity of 1 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular to the axis 103 of the focused laser beam, leads to formation of a set of non-overlapping local regions 206 in the plane 604 which is placed under the crystal surface 105 at the depth defined by focusing depth of the laser beam 102. The average distance between the local regions equals $10 \mu\text{m}$. When scanning and moving the focused laser beam 102 in the horizontal plane from left to right, area of the section plane 604 with a set of the local regions is increased from left to right deep into the crystal up to the right bound of the crystal in FIG. 6. Laser treatment is performed at room temperature $T_p=20^\circ \text{C}$.

[0046] At this point process of laser treatment is completed. Then crystal **101** is adhered with upper surface **105** on the aluminium plate and heated to the temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of gallium arsenide and aluminium arsenide, crystal **101** splits along the mechanically reduced plane **604** with separating a surface lateral layer lying higher the plane **604** from the main gallium arsenide crystal.

Example 5

[0047] FIG. 7 is the scheme **400** illustrating the second variation of the method by the example of separating a thin semiconductor layer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn under the upper surface, from semiconductor crystal. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor, and generates light pulses with $\lambda=532$ nm, energy of 5 μ J, duration of 5 ns and repetition rate of 1000 Hz. Laser beam is focused to the spot of 16 μ m in diameter which provides energy density of 2 J/cm².

[0048] Under action of the Nd:YAG laser emission **102** with wavelength $\lambda=532$ nm weakly absorbed in the gallium nitride crystal **101** and in light diode structure AlGaIn/InGaIn/AlGaIn, focused under the upper crystal surface **105** at the depth of 50 μ m, non-overlapping local regions **206** are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Movement of the laser beam **102** focus at velocity of 5 cm/s in the horizontal plane parallel to the crystal surface **105** through which laser beam enters the crystal, and perpendicular to the axis **103** of the focused laser beam, leads to formation of a set of non-overlapping local regions **206** in the lateral separation plane **604** which is placed under the crystal surface **105** at the depth defined by focusing depth of the laser beam **102**. The average distance between the local regions equals 5 μ m. When scanning laser beam **102** with focus in the horizontal plane from left to right, area of the section plane **604** with a set of the local regions is increased from left to right deep into the crystal up to the right bound of the crystal in FIG. 7. Laser treatment is performed at room temperature $T_p=20^\circ$ C.

[0049] At this point process of laser treatment is completed. Then crystal **101** is adhered with upper surface **105** on the aluminium plate and heated to the temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of gallium nitride and aluminium nitride, crystal **101** splits along the mechanically reduced plane **604** with separating a surface lateral layer **407** with light diode structure AlGaIn/InGaIn/AlGaIn lying higher the plane **604** from the main gallium nitride crystal.

Example 6

[0050] FIG. 8 is a scheme **800** illustrating the second variation of the method by the example of separating a thin semiconductor layer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn in the base, from semiconductor crystal.

[0051] For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates pulses with energy of 50 μ J, duration of 5 ns and

repetition rate of 10000 Hz. Laser beam is focused to the spot of 1 μ m in diameter which provides energy density of 5 J/cm².

[0052] Under action of the Nd:YAG laser emission **102** with wavelength $\lambda=532$ nm weakly absorbed in the gallium nitride crystal **101**, but absorbed in the light diode structure AlGaIn/InGaIn/AlGaIn, focused deep under the upper crystal surface **105**, non-overlapping local regions **206** are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Movement of the laser beam **102** focus at velocity of 5 cm/s in the horizontal plane parallel to the crystal surface **105** through which laser beam enters the crystal, and perpendicular to the axis **103** of the focused laser beam, leads to formation of the non-overlapping local regions **206** in the lateral plane **604** which lies under the crystal surface **105** at the depth defined by the depth of the laser beam **102** focusing. The average distance between the local regions equals 5 μ m. When scanning laser beam **102** with focus in the horizontal plane from left to right, area of the section plane **604** with a set of the local regions is increased from left to right deep into the crystal up to the right bound of the crystal in FIG. 8. Laser treatment is performed at room temperature $T_p=20^\circ$ C.

[0053] At this point process of laser treatment is completed. Then crystal **101** is adhered with upper surface **105** on the aluminium plate and heated to the temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of gallium nitride and aluminium nitride, crystal **101** splits along the mechanically reduced plane **604** with separating a lower lateral layer **307** with light diode structure AlGaIn/InGaIn/AlGaIn lying lower the plane **604** from the main gallium nitride crystal.

Example 7

[0054] FIG. 9 is a scheme **900** illustrating the first variation of the method by the example of separating a surface layer of the semiconductor cylindrical gallium nitride boule. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates pulses with energy of 5 μ J, duration of 5 ns and repetition rate of 1000 Hz. Laser beam is focused to the spot of 16 μ m in diameter which provides energy density of 2 J/cm².

[0055] Under action of the Nd:YAG laser emission **102** with wavelength $\lambda=532$ nm focused under the surface **105** at the depth of 200 μ m of the cylindrical gallium nitride boule **901**, the crystal is locally heated up to temperature higher than 900° C. leading to chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity **106** of the laser beam focus.

[0056] Movement of the laser beam **102** focus on a spiral path at velocity of 1.5 cm/s in the horizontal plane parallel to the crystal surface **105** through which laser beam enters the crystal, and perpendicular to the axis **103** of the focused laser beam, leads to consequent decomposition of gallium nitride and to increase of width of the lateral cut **304** on a spiral path from periphery deep into the crystal towards the axis of the cylindrical boule in FIG. 9, continuity of the cylindrical gallium nitride boule **901** is disturbed and gallium nitride washer **902** being higher the cut **304** is separated from the cylindrical gallium nitride boule. To avoid cracking of the separable gallium nitride washer caused by thermal stresses laser cutting is performed at temperature $T_p=600^\circ$ C.

Example 8

[0057] FIG. 10 is the scheme 1000 illustrating the first variation of the method by the example of separating a thin semiconductor washer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn under the upper surface, from cylindrical semiconductor gallium nitride boule. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates light pulses with energy of 5 μ J, duration of 5 ns and repetition rate of 1000 Hz. Laser beam is focused to the spot of 16 μ m in diameter which provides energy density of 2 J/cm².

[0058] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532$ nm weakly absorbed in the gallium nitride crystal 101 and in light diode structure AlGaIn/InGaIn/AlGaIn, focused under the upper crystal surface 105 at the depth of 50 μ m of the cylindrical boule, the crystal is locally heated up to temperature higher than 900° C. leading to chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity 106 of the laser beam focus.

[0059] Lateral movement of the laser beam 102 focus on a spiral path at velocity of 1.5 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular to the axis 103 of the focused laser beam, leads to consequent decomposition of gallium nitride and to increase of width of the lateral cut 304 on a spiral path from periphery deep into the crystal towards the axis of the cylindrical boule. On achieving by the lateral cut 304 the axis of the cylindrical boule in FIG. 10, continuity of the cylindrical gallium nitride boule 901 is disturbed and gallium nitride washer 902 with a grown light diode structure AlGaIn/InGaIn/AlGaIn being higher the cut 304 is separated from the cylindrical gallium nitride boule. To avoid cracking of the separable gallium nitride washer caused by thermal stresses laser cutting is performed at temperature $T_p=600^\circ$ C.

Example 9

[0060] FIG. 11 is the scheme 1100 illustrating the first variation of the method by the example of separating a thin semiconductor washer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn in the base, from cylindrical semiconductor gallium nitride boule.

[0061] For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates light pulses with energy of 5 μ J, duration of 5 ns and repetition rate of 1000 Hz. Laser beam is focused to the spot of 16 μ m in diameter which provides energy density of 2 J/cm².

[0062] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532$ nm weakly absorbed in the gallium nitride crystal, but absorbed in the light diode structure AlGaIn/InGaIn/AlGaIn, focused deeply under the upper crystal surface 105 of the cylindrical gallium nitride boule 901, the crystal is locally heated up to temperature higher than 900° C. leading to the chemical decomposition of gallium nitride crystal into gaseous nitrogen and liquid gallium in the vicinity 106 of the laser beam focus. Movement of the laser beam 102 focus at velocity of 1.5 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular to the axis 103 of the focused laser beam, leads to consequent decomposition of gallium nitride and to increase of width of the lateral cut 304 on a spiral path from periphery deep into the crystal towards

the axis of the cylindrical boule. On achieving by the lateral cut 304 the axis of the cylindrical boule in FIG. 11, continuity of the cylindrical gallium nitride boule 901 is disturbed and gallium nitride washer 902 with grown light diode structure 407 AlGaIn/InGaIn/AlGaIn lying lower the cut 304 is separated from the cylindrical gallium nitride boule.

Example 10

[0063] FIG. 12 is a scheme 1200 illustrating the second variation of the method by the example of separating a washer from the semiconductor cylindrical boule of the aluminum nitride crystal. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates pulses with energy of 50 μ J, duration of 5 ns and repetition rate of 10000 Hz. Laser beam is focused to the spot of 1 μ m in diameter which provides energy density of 5 J/cm².

[0064] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532$ nm, focused under the surface 105 of cylindrical aluminium nitride boule 901 at the depth of 100 μ m, non-overlapping local regions 206 are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Movement of the laser beam 102 focus at velocity of 5 cm/s in the horizontal plane parallel to the crystal surface 105 through which laser beam enters the crystal, and perpendicular to the axis 103 of the focused laser beam, leads to formation of a set of non-overlapping local regions 206 in the lateral plane 604 which is placed under the crystal surface 105 at the depth defined by focusing depth of the laser beam 102. The average distance between the local regions equals 5 μ m. Focus of laser beam 102 is moved in the horizontal plane on a spiral path from periphery deep into the crystal towards the axis of the cylindrical boule. Area of the plane 604 with a set of the local regions is increased from periphery deep into the crystal towards the axis of the cylindrical boule. On achieving the axis of the cylindrical boule with focus, process of laser treatment is finished. Laser treatment is performed at room temperature $T_p=20^\circ$ C.

[0065] Then cylindrical boule 901 is adhered with upper surface 105 on the aluminium plate and heated to temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of aluminium nitride and aluminium, cylindrical boule 901 of aluminium nitride crystal splits along the mechanically reduced plane 604 with separating a nitride aluminium washer 902 lying higher the plane 604 from the main cylindrical aluminium nitride boule.

Example 11

[0066] FIG. 13 is the scheme 1300 illustrating the second variation of the method by the example of separating a thin semiconductor washer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn under the upper surface, from cylindrical semiconductor gallium nitride boule. For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532$ nm, and generates pulses with energy of 50 μ J, duration of 5 ns and repetition rate of 10000 Hz. Laser beam is focused to the spot of 1 μ m in diameter which provides energy density of 5 J/cm².

[0067] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532$ nm weakly absorbed in the gallium nitride crystal and in the light diode structure AlGaIn/InGaIn/AlGaIn, focused under the cylindrical boule surface 105 at the

depth of 50 μm, non-overlapping local regions 206 are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Focus of the laser beam 102 is moved at velocity of 5 cm/s in the horizontal plane on a spiral path from periphery deep into the crystal towards the axis of the cylindrical boule. Area of the plane 604 with a set of non-overlapping local regions 206 is increased from periphery deep into the crystal towards the axis of the cylindrical boule. The average distance between the local regions equals 5 μm. On achieving the axis of the cylindrical boule with focus, process of laser treatment is finished. Laser treatment is performed at room temperature $T_p=20^\circ\text{C}$.

[0068] Then cylindrical boule 901 of gallium nitride crystal is adhered with upper surface 105 on the aluminium plate and heated to temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of gallium nitride and aluminium, cylindrical boule 901 of aluminium nitride crystal splits along the mechanically reduced plane 604 with separating a gallium nitride washer 902 with a grown light diode structure 407 AlGaIn/InGaIn/AlGaIn lying higher the plane 604 from the main cylindrical gallium nitride boule.

Example 12

[0069] FIG. 14 is the scheme 1400 illustrating the second variation of the method by the example of separating a thin semiconductor washer comprising a grown light diode structure AlGaIn/InGaIn/AlGaIn in the base, from cylindrical semiconductor gallium nitride boule.

[0070] For this purpose Nd:YAG laser is used which operates in the mode of modulated Q-factor at $\lambda=532\text{ nm}$, and generates pulses with energy of 50 μJ, duration of 5 ns and repetition rate of 10000 Hz. Laser beam is focused to the spot of 1 μm in diameter which provides energy density of 5 J/cm².

[0071] Under action of the Nd:YAG laser emission 102 with wavelength $\lambda=532\text{ nm}$ weakly absorbed in the gallium nitride crystal, but absorbed in the light diode structure AlGaIn/InGaIn/AlGaIn 407, focused deeply under the surface 105 of the boule, non-overlapping local regions 206 are formed in which structure of chemical bonds is disturbed, chemical interaction between atoms is reduced and mechanical strength of the crystal is decreased. Focus of the laser beam 102 is moved at velocity of 5 cm/s in the horizontal plane on a spiral path from periphery deep into the crystal towards the axis of the cylindrical boule. Area of the plane 604 with a set of non-overlapping local regions 206 is increased from periphery deep into the crystal towards the axis of the cylindrical boule. The average distance between local regions equals 5 μm. On achieving the axis of the cylindrical boule with focused laser beam 102, process of laser treatment is finished. Laser treatment is performed at room temperature $T_p=20^\circ\text{C}$.

[0072] Then cylindrical boule 901 of gallium nitride crystal is adhered with upper surface 105 on the aluminium plate and heated to temperature of 100-500° C. In this case, because of thermomechanical stress related with difference between the thermal expansion coefficients of gallium nitride and aluminium, cylindrical boule 901 of aluminium nitride crystal splits along the mechanically reduced plane 604 with separating a gallium nitride washer 902 with a grown light diode structure 407 AlGaIn/InGaIn/AlGaIn lying lower the plane 604 from the main cylindrical gallium nitride boule.

[0073] Despite that this invention has been described and illustrated by examples of the invention embodiments, it should be noted that this invention by no means is not limited by the examples given.

1. A method of separating a surface layer of a semiconductor crystal, the method comprising:

directing a focused laser beam onto the crystal in such a way that focus is placed in a layer separation plane perpendicular to an axis of said beam;

moving the laser beam with scanning the layer separation plane with focus in a direction from an open side surface of the crystal deep into the crystal with forming a continuous slit a width of which is increased with every pass of the laser beam; and

performing the moving of the laser beam operation up to separation of the surface layer.

2. The method according to claim 1, wherein for separation of the surface layer from the crystal in a form of cylindrical boule, scanning of the layer separation plane is performed from a side cylindrical surface deep into the crystal on a spiral path.

3. The method according to claim 1, wherein for separation of the surface layer from the crystal in a form of parallelepiped, scanning of the layer separation plane is performed by reciprocal movement of the laser beam with shift by step forming a movement trajectory of the focus in a form of meander.

4. The method according to claim 1, wherein the crystal is previously heated up to 100° C.-1000° C.

5. A method of separating a surface layer of a semiconductor crystal, the method comprising:

generating a pulse laser emission;

directing a focused laser beam onto the crystal in such a way that focus is placed in a layer separation plane perpendicular to an axis of said beam;

moving the laser beam in such a way that focus is moved in the layer separation plane with forming non-overlapping local regions with a disturbed topology of structure of the crystal and with reduced interatomic bonds, wherein said local regions are distributed over the whole said layer separation plane;

applying an external action to a separable layer disturbing said reduced interatomic bonds.

6. The method according to claim 5, wherein the external action is a mechanical action.

7. The method according to claim 5, wherein the external action is a thermomechanical action.

8. The method according to claim 7, wherein the thermomechanical action is created using a metal plate attached to an external surface of the separable layer and heating up to temperature of 50° C.-1000° C.

9. The method according to claim 5, wherein a distance between centers of said non-overlapping local regions constitutes 0.03-0.3 of a thickness of the separable layer.

10. The method according to claim 1, wherein the surface layer of the semiconductor crystal contains grown in layered semiconductor device structure.

11. The method according to claim 5, wherein the surface layer of semiconductor crystal contains grown in layered semiconductor device structure.

12. The method according to claim 2, wherein the crystal boule is previously heated up to 100° C.-1000° C.